

## Panel Mount LED Indicators- Chrome Recessed M6 PA03CPx-24V Series

### Features:

- Ø7.0mm Bezel, M6 Thread
- Bright chrome housing
- Sealed to IP20 or IP67
- Diffused or Clear lens
- Choice of termination
- Range of LED colours
- Low Voltage, High Efficiency
- Long Life – 50,000 hrs typical
- High Reliability, Maintenance Free




### Description

Attractive, panel mount lamp comprising of a single 3.0mm LED emitter with a choice of termination

### Specifications

Part No.	Reference	LED Chip	Emitted Colour	Wavelength (nm)	Voltage	Luminous Intensity (mcd) @15mA	Viewing Angle
PA03CRI-24V	19030353	GaAsP/GaP	Red/Diffused	635	24VDC	35	36°
PA03CRW-24V	1903035W	GaAsP/GaP	White			1000	
PA03CRG-24V	19030351	GaP	Green/Diffused	570		30	
PA03CRY-24V	19030352	GaAsP/GaP	Yellow/Diffused	588		20	
PA03CRB-24V	19030357	InGaN	Blue/Diffused	470		40	

### Dimensions

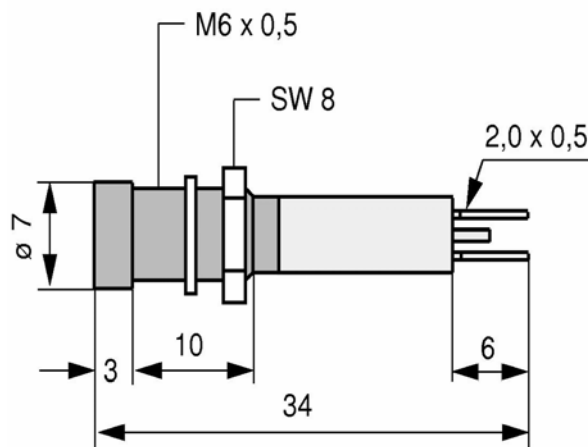

Please contact our office for the latest intensity yields  
Specifications may be subject to change without notice