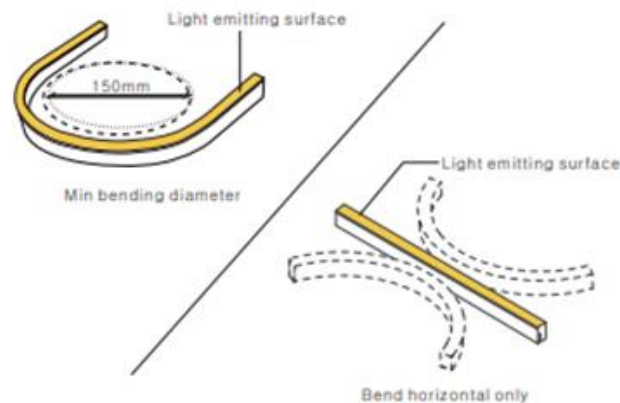
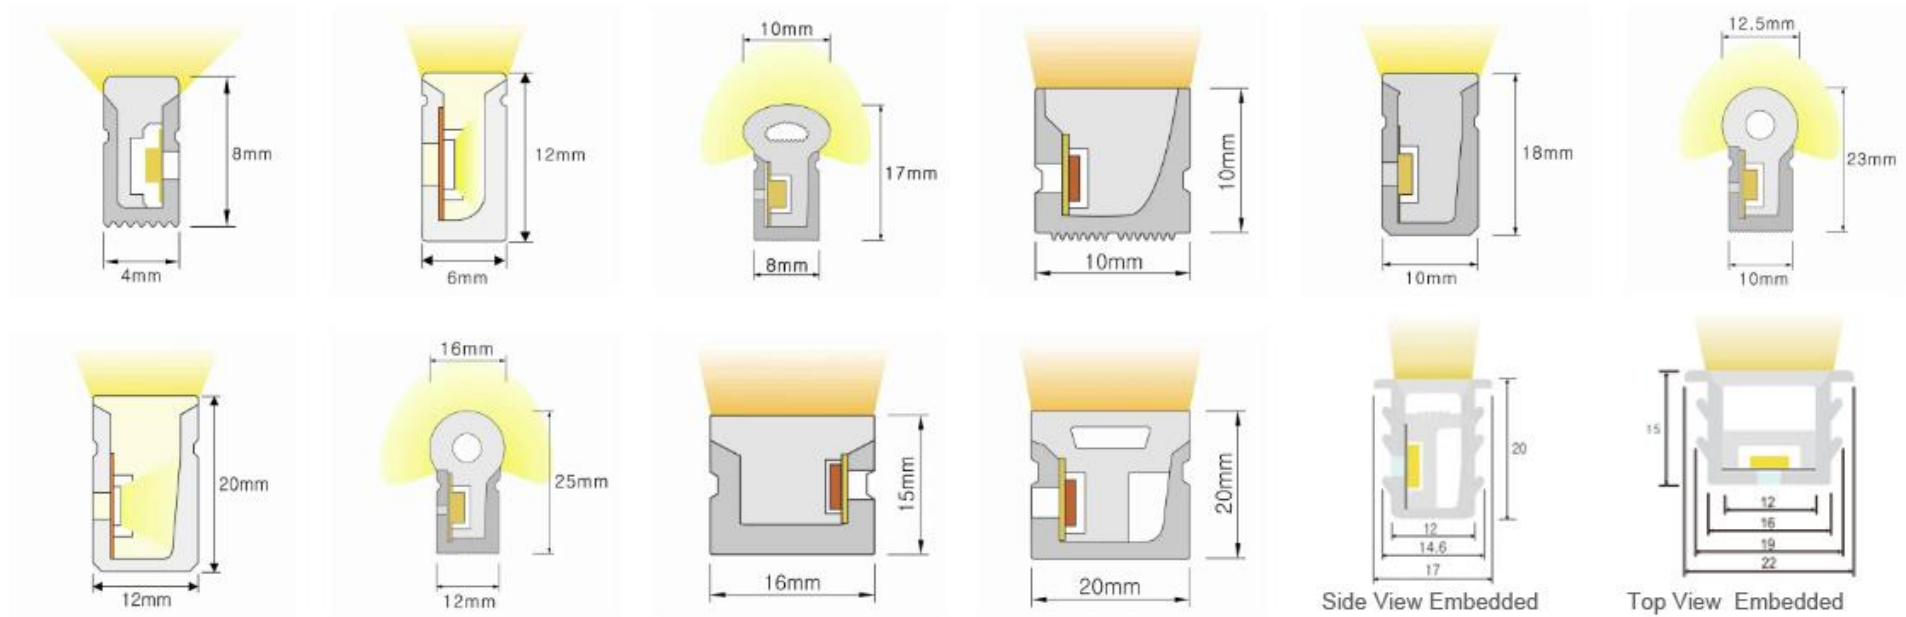








Neon Flex selector guide PNS series Side View Horizontal bend

We offer a range of Flexible Neon Strip to provide a rugged, flexible solution for linear lighting applications. Designed as an upgrade alternative to traditional glass neon, the construction is resistant to abrasion, chemicals & salt water. The silicone diffusion produces a smooth even illumination with no spotting.






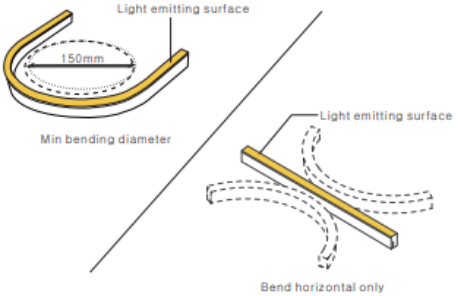
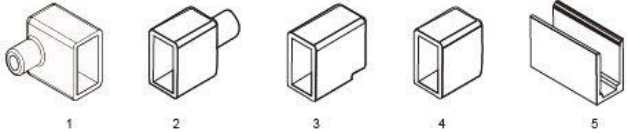
Side View Horizontal bend profiles



Neon Flex selector guide PNS series Side View Horizontal bend

Part Number	Section	Specification	Part Number	Section	Specification
PNS-1023 series 10x23mm 24VDC IP65, IP67, IP68		Power/m: 5W / 10W / 15W Intensity: 197 / 387 / 542lm/m Cut points: 50mm Beam angle: 180° White, Colours Tuneable & RGB	PNS-0408 series 4x8mm 24VDC IP67		Power/m: 6W Intensity: 258 lm/m Cut points: 25mm Beam angle: 120° White choice of CCT
PNS-0612 series 6x12mm 24VDC IP67		Power/m: 5W / 10W Intensity: 190 / 359 lm/m Cut Points: 50mm Beam angle: 180° White, Colours Tuneable & RGB	PNS-0817 series 8x17mm 24VDC IP67		Power/m: 5W / 10W Intensity: 175 / 344 lm/m Cut Points: 50mm Beam angle: 180° White, Colours Tuneable & RGB
PNS-1010 series 10x10mm 24VDC IP67		Power/m: 5W / 10W Intensity: 356 / 690 lm/m Cut Points: 50mm Beam angle: 120° White, Colours Tuneable & RGB	PNS-1018 series 10x18mm 24VDC IP67		Power/m: 5W / 10W / 15W Intensity: 180 / 346 / 483lm/m Cut Points: 50mm Beam angle: 120° White, Colours Tuneable & RGB

Neon Flex selector guide PNS series Side View Horizontal bend

<p>PNS-1225 series 12x25mm 24VDC IP67</p>		<p>Power/m: 5W / 10W /15W Intensity: 160 / 318 / 441lm/m Cut Points: Mono/CT 50mm Cut Points: RGB 62.5mm Beam angle: 180° White, Colours Tuneable, RGB, RGBW</p>	<p>PNS-1615 series 16x15mm 24VDC IP67</p>		<p>Power/m: 5W / 10W /15W Intensity: 300 / 583 / 815lm/m Cut Points: Mono/CT 50mm Cut Points: RGB 62.5mm Beam angle: 120° White, Colours Tuneable, RGB, RGBW</p>
<p>PNS-2020 series 20x20mm 24VDC IP67</p>		<p>Power/m: 5W / 10W /15W Intensity: 248 / 480 / 687lm/m Cut Points: Mono/CT 50mm Cut Points: RGB 62.5mm Beam angle: 120° White, Colours Tuneable, RGB, RGBW</p>	<p>PNS-1220 series 12x20mm 24VDC IP67</p>		<p>Power/m: 5W / 10W /15W Intensity: 177 / 345 / 475lm/m Cut Points: Mono/CT 50mm Cut Points: RGB 62.5mm Beam angle: 120° White, Colours Tuneable, RGB, RGBW</p>
<p>PNS-S1220T series Embedded 12x20mm 24VDC IP44</p>	 <p>Unit: mm</p>	<p>Power/m: 10W Intensity: 364 - 407lm/m Cut Points: 50mm Beam angle: 120° White, Colours Tuneable, RGB, RGBW</p>	<p>Side View Horizontal bend detail</p> 		
<p>End Caps & Clips</p> <ol style="list-style-type: none"> 1) Side out 2) Straight out 3) Bottom out 4) End Cap 5) Mounting clip 		<p>Neon Flex is available in a choice of colours / colour temperatures, CT,RGB and RGBW and supplied in standard reels of 5.0metre lengths</p>			

Selector guide is for reference only. Please contact our office for full data sheets
Specifications may be subject to change without notice